




PLAN

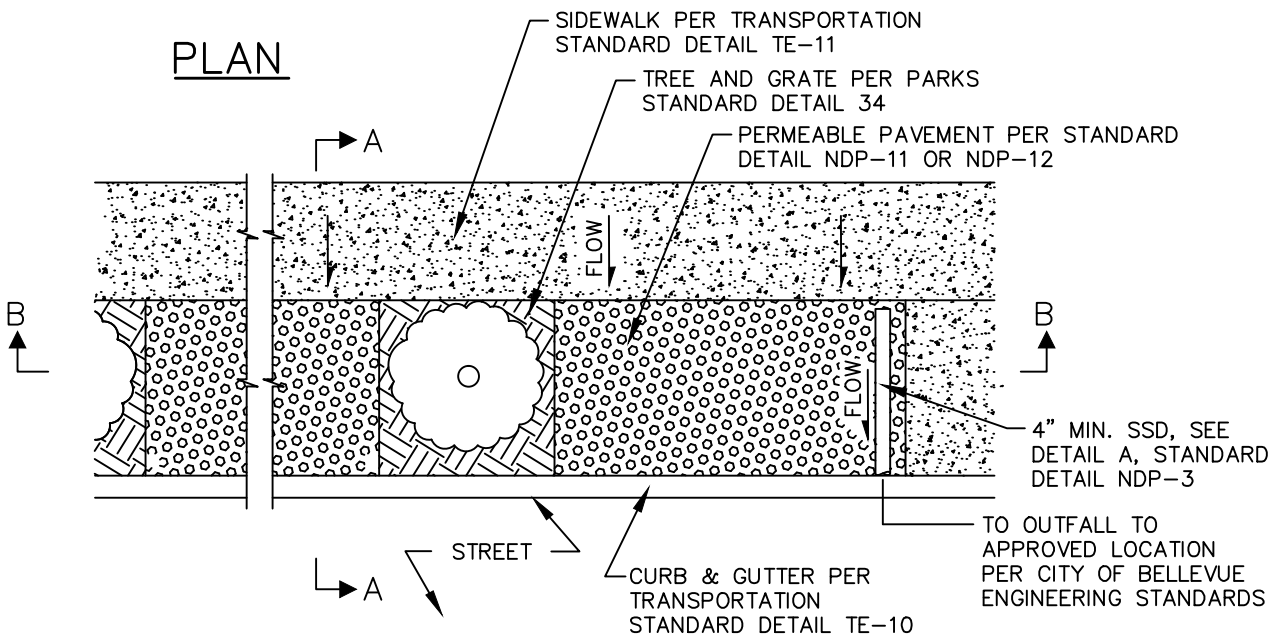

SECTION A-A

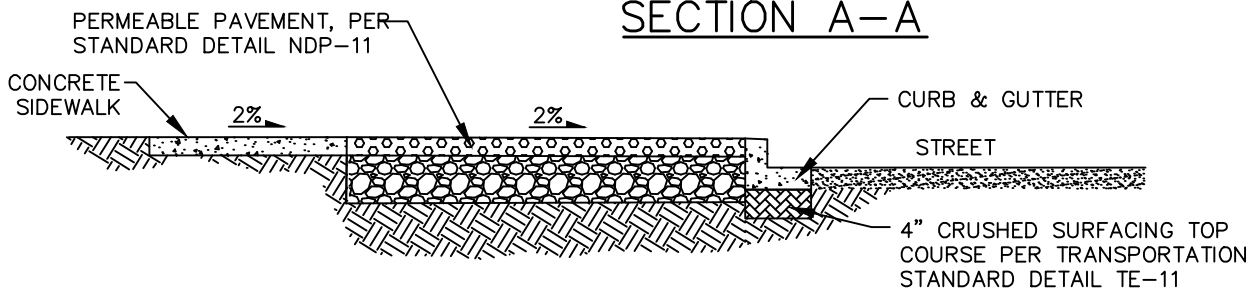

SECTION B-B

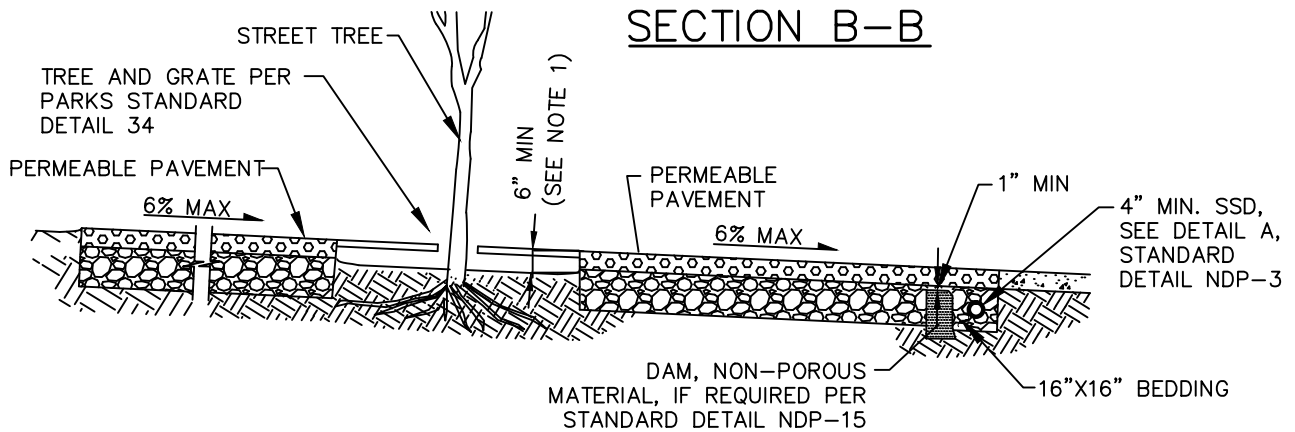

NOTE:

1. 6" MIN. DEPTH IN THE TREE PIT APPLIES TO PERVIOUS CEMENT CONCRETE SIDEWALK ONLY. IF OTHER PERMEABLE PAVER MATERIAL USED, NO MIN. DISTANCE REQUIRED.
2. ROOT BARRIER AS NECESSARY AS DIRECTED BY THE ENGINEER.



City of
Bellevue

STORM AND SURFACE
WATER UTILITIES

TITLE

PERMEABLE PAVEMENT SIDEWALK
IN PLANTING STRIP

NO. NDP-13