


DRIVEWAY APPROACH DETAIL

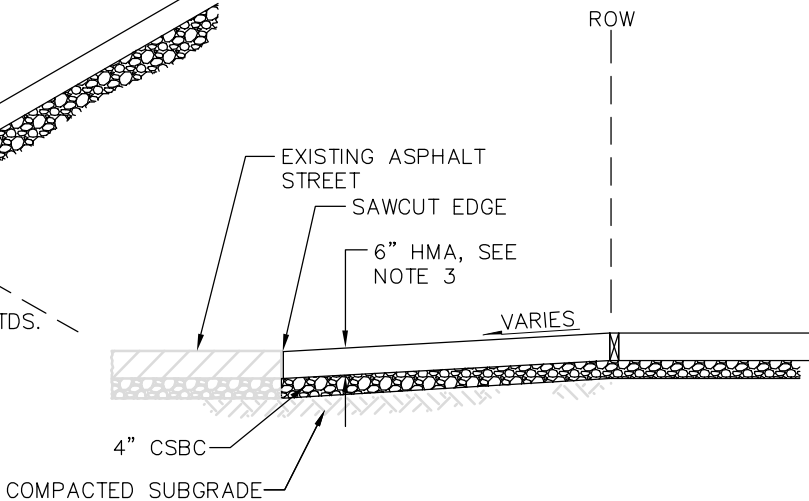

SECTION A-A

NOTES:

1. SEE DESIGN STANDARD 5 FOR DRIVEWAY GUIDELINES, INCLUDING GRADE REQUIREMENTS FOR LANDING AND DRIVEWAY. DRIVEWAY WIDTH SHALL BE SPECIFIED BY THE ENGINEER.
2. SAWCUT AND TACK ROAD TO DRIVEWAY APPROACH JOINT.
3. DRIVEWAY APPROACH TO BE 6" HMA CLASS 1/2" PG 58H-22 ASPHALT IN 2" LIFT OVER 4" LIFT.
4. HOT MIX ASPHALT OR CONCRETE TO BE PLACED OVER COMPACTED SUBGRADE AND 4" OF CSTC COMPACTED TO 95%.
5. TYPICAL EDGE RADIUS: COMMERCIAL 15'
SINGLE FAMILY 10'
6. DRIVEWAY APPROACH SHALL NOT CONTAIN REINFORCING STEEL.



**DRIVEWAY APPROACH
WHERE NO CURB-GUTTER EXISTS**

DRAWING NUMBER	SW-190-1
SCALE	NONE
REVISION DATE	12/22
DEPARTMENT	TRANS